



# ENAPART



93 S Railroad Avenue Unit C  
Bergenfield NJ 07621 USA  
[www.enapart.com](http://www.enapart.com)  
[sales@enapart.com](mailto:sales@enapart.com)



Via del Canneto 35,  
Borgosatollo, Brescia - Italia  
[www.enapart.it](http://www.enapart.it)  
[vendite@enapart.it](mailto:vendite@enapart.it)



Barbaros Mah. Ihlamur Bul. Aĝaoĝlu  
My Newwork No:3/15 Ataşehir / İstanbul  
[www.enapart.net](http://www.enapart.net)  
[satis@enapart.net](mailto:satis@enapart.net)



PRIVADA 10 B SUR #3908 COL.  
ANZUREZ, C.P. 72530, PUEBLA, PUE  
[www.enapart.com.mx](http://www.enapart.com.mx)  
[sales@enapart.com.mx](mailto:sales@enapart.com.mx)



Friedrich-Ebert-Anlage 36, 60325  
Frankfurt am Main, Germany  
[www.enapart.de](http://www.enapart.de)  
[anfrage@enapart.de](mailto:anfrage@enapart.de)



4 boulevard Carnot, 95400  
villiers-le-bel, Paris, France  
[www.enapart.fr](http://www.enapart.fr)  
[sales@enapart.fr](mailto:sales@enapart.fr)



65049, ОДЕСА, ВУЛИЦЯ ІВАНА  
ФРАНКА, БУДИНОК 55, ПОВЕРХ 3  
[www.enapart.com.ua](http://www.enapart.com.ua)  
[sales@enapart.com.ua](mailto:sales@enapart.com.ua)



MUNICIPIUL BUCUREȘTI, SECTOR 3,  
B-DUL BASARABIA, NR.250, CORP P+5  
[www.enapart.ro](http://www.enapart.ro)  
[sales@enapart.ro](mailto:sales@enapart.ro)



〒584-0023 大阪府富田林市若松町  
東2丁目2番16号  
[www.enapart.co.jp](http://www.enapart.co.jp)  
[sales@enapart.co.jp](mailto:sales@enapart.co.jp)



PLAZA NUESTRA SEÑORA DE LAS  
NIEVES 12 ,LOCAL ,50012,ZARAGOZA  
[www.enapart.es](http://www.enapart.es)  
[ventas@enapart.es](mailto:ventas@enapart.es)



Складова база „Онгъл“, Склад А2, п.к.  
4006, гр. Пловдив, България  
[www.enapart.bg](http://www.enapart.bg)  
[sales@enapart.bg](mailto:sales@enapart.bg)



3 Austin Mews, High Street, Hemel  
Hempstead, HP1 3AF , United Kingdom  
[www.enapart.co.uk](http://www.enapart.co.uk)  
[sales@enapart.co.uk](mailto:sales@enapart.co.uk)

## Multi Level Switch

## UNS-2000 Series

Formerly Series BLS 800

### Features

- ▶ Fully customizable
- ▶ Up to 6 independent switch points
- ▶ Reversible switch logic
- ▶ Suitable for high viscosity liquids
- ▶ Optional integral temperature switch
- ▶ Hermetically sealed reed switches

### Applications

- ▶ Sump tanks
- ▶ Hydraulic power units
- ▶ Storage tanks
- ▶ Solvent recovery systems
- ▶ Lube oil console systems
- ▶ Marine applications



### General Specifications\*

<b>Max. Operating Pressure:</b>	580 PSI (40 bar), depends on mounting element and float
<b>Minimum Specific Gravity:</b>	
NBR (BUNA):	0.6 g/cm <sup>3</sup>
S.S:	0.78 g/cm <sup>3</sup>
<b>Mounting Position:</b>	Vertical, ±30°, through top or bottom
<b>Protection Class:</b>	IP65 for ST-, KL- and PG-design IP67, IP68 on request IP54 for K-design

\* See Product Configurator for additional options.

<b>Operating Temperature:</b>	+14 °F to +221 °F (-10 °C to +105 °C), PVC-cable
<b>Special Design Options: (On Request)</b>	DR - Damping Tube HT - High Temperature Application - (-40 °C up to +150 °C) F- Silicone Cable U - Mounting location through bottom PT100 - PT100-Element TP - Temperature switch V V - Vertical Adjustment EXi - ATEX-approval EEx ia
<b>Contact Mode:</b>	NO or NC are defined on the basis of an empty tank and for installation through the top
<b>Weight:</b>	Depends on length and design


### Max. Switchpoints

	KL6C AL Terminal Box	KL12C AL Terminal Box	ST1 DIN Connector	ST2 DIN Connector	PG Cable gland
<b>Connect Group 1</b>	5	6	2	5	6
<b>Connect Group 2</b>	2	4	1	2	4
<b>Connect Group 3</b>	3	4	1	3	4
<b>Connect Group 4</b>	2	3	1	2	3

### Combinations

Material	Mounting	Electrical Connection	Float
Stainless Steel (VA)	T1-1/4 NPT T2 NPT FLAS	DIN Connector (ST1 & ST2) Terminal box (KL6C or KL12C) Cable gland (PG) PVC Cable (K)	Stainless Steel (VA52)
	1/2 NPT	Cable gland (PG) PVC Cable (K)	
Brass (MS)	T1-1/4 NPT T2 NPT	DIN Connector (ST1 & ST2) Terminal box (KL6C or KL12C) Cable gland (PG) PVC Cable (K)	NBR (Buna-N) (BN30)
	1/2 NPT	Cable gland (PG) PVC Cable (K)	

### Wiring Color / Code

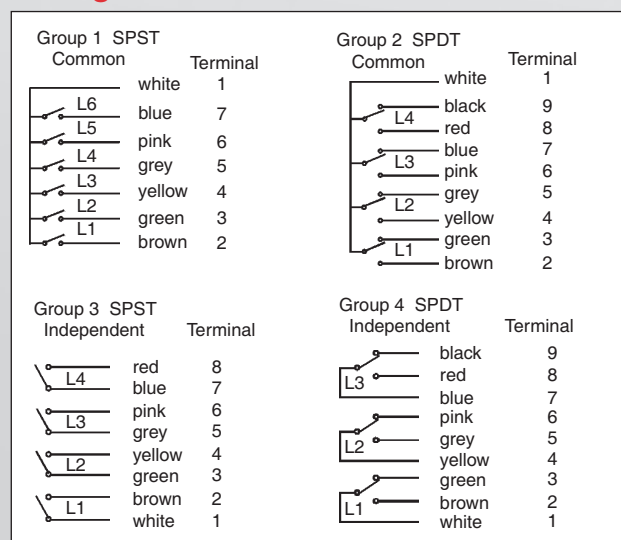

## Barksdale®

CONTROL PRODUCTS

Barksdale, Inc./Barksdale GmbH  
A Subsidiary of Crane Co.




# Multi Level Switch

# UNS-2000 Series

## Technical Drawing

## Formerly Series BLS 800

Dimensions in inch (mm)

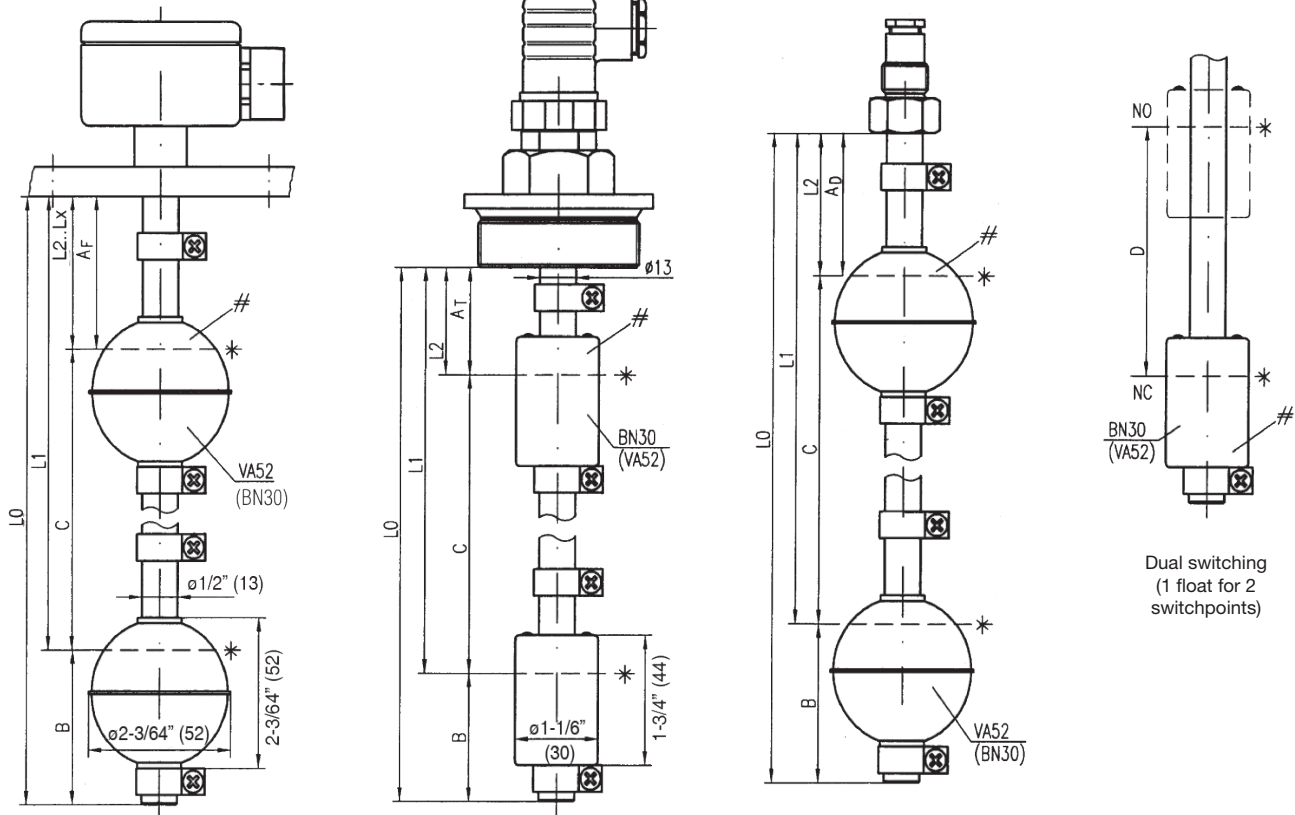

With Aluminum Junction Box and 1/2" NPT female conduit (KL6C or KL12C)

With DIN Connector (ST1)

With Cable gland (PG)

Dual switching (1 float for 2 switchpoints)

### Mounting Types:

1. Length tolerance  $\pm 3$  mm
2. L0 = max. 3000 mm (118 inches)

- \* Immersion depth at density 1:  
 VA52 =  $36 \pm 2$  mm  
 BN30 =  $20 \pm 2$  mm


- # Float position:  
 VA52 = NO/NC  $\Rightarrow$  see float marking  
 SPDT  $\Rightarrow$  NO-function  
 BN30 = NO  $\Rightarrow$  compound points at bottom  
 NC  $\Rightarrow$  compound points at top  
 SPDT  $\Rightarrow$  compound points at bottom

Dimensions	Min. distances in mm					
	A <sub>F</sub>	A <sub>T</sub>	A <sub>D</sub>	B*	C	D
Float type						
VA52	32	32	32	55	85	55
BN30	40	40	40	39	77	55


- \*When using -DR: Dimension B + 20 mm!  
 \*When using -PT100: Dimension is B + 10 mm  
 \*When using -TPxx/2: Dimension is B + 40 mm




1/2" NPT



T1-1/4" or T2" NPT



**FLA5**  
 3" 150# Flange  
 with 1/2" NPT Male Fitting  
 (per applicable ANSI specifications)  
 Flange only available in stainless steel.

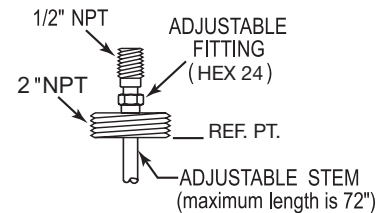

**Adjustable Stem**  
 Only available with flange and 'T' type connections

## Multi Level Switch

**UNS-2000 Series**

Formerly Series BLS-800

### UNS-2000 Series Order Form

Check Boxes to Select Specification Requirements

Description:

UNS 2000 - \_\_\_\_\_ / \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ - \_\_\_\_\_ / \_\_\_\_\_ - \_\_\_\_\_

#### Product Configurator

Example	UNS 2000	-VA	/ T2NPT	-KL6C	-VA52	L2	/ 2.1	-(DR)-(VV)-HT-U-PT100-TP/XX.X-Exi
---------	----------	-----	---------	-------	-------	----	-------	-----------------------------------

#### Basic Configuration

UNS 2000 Level switches type

Check Required Specs

#### Material of Stem

- VA SS316  
 MS Brass

#### Mounting Element

- 1/2NPT 1/2" NPT mounting (inside tap)  
 T1-1/4NPT 1-1/4" NPT tank screw  
 T2NPT 2" NPT tank screw  
 FLA5 3" Blind flange (150#)

#### Electrical Connection<sup>1</sup>

- ST1 Cube plug DIN 43650, 3-pin + GND  
 ST2 Angle plug DIN 43651, 6-pin + GND  
 KL6C Aluminum terminal box, 6 terminals with 1/2" NPT conduit  
 KL12C Aluminum terminal box, 9 terminals with 1/2" NPT conduit  
 PG PG-cable gland with 1 m PVC-cable  
 K PVC-cable sealed, specify length at order  
 KXP Explosion proof junction box with 1/2" conduit  
 C 1/2" NPT male conduit (VA only)

<sup>1</sup> See "Combinations" section on page 1 for mounting and electrical connection options.

#### Float Type

	Min. Density	Material	Form	Ø	Max. Temp.	Max. Bar
<input type="checkbox"/> BN30	0.6 g/cm <sup>3</sup>	NBR	Cylinder	30 mm 1-3/16	212 °F (100 °C) - Oil 176 °F (80 °C) - Water	15
<input type="checkbox"/> VA52	0.78 g/cm <sup>3</sup>	Stainless steel, 316	Ball	52 mm 2-1/16	302 °F (150 °C)	40

#### No. of Switchpoints<sup>2</sup>

L=Level, T=Temperature

- L1 1 Switchpoint @ \_\_\_\_\_ in/mm  
 L2 2 Switchpoints @ \_\_\_\_\_ in/mm  
 L3 3 Switchpoints @ \_\_\_\_\_ in/mm  
 L4 4 Switchpoints @ \_\_\_\_\_ in/mm  
 L5 5 Switchpoints @ \_\_\_\_\_ in/mm  
 L6 6 Switchpoints @ \_\_\_\_\_ in/mm

See also Connection Groups in table "Max. Switchpoints"

#### Options, please specify when needed

- DR Damping tube  
 HT High temperature silicone cable (max 6 wires), (up to +150 °C) 302°F  
 U Mounting through bottom  
 PT100 PT100-element  
 VV Vertical adjustment  
 Exi ATEX approval EEx ia  
 TP 3A, 12 or 24V DC  
 X Contact mode 2 (NC)  
 XX Setpoint at rising in °C

Standard +122 °F / +158 °F / +194 °F (+50 °C / +70 °C / +90 °C)  
Others on request

#### Contact Type of Float


	Contact Mode	Contact Rating
<input type="checkbox"/>	1-SPST (NO)	250 V AC / DC, 3 A, 100 VA / W
<input type="checkbox"/>	2-SPST (NC)	250 V AC / DC, 3 A, 100 VA / W
<input type="checkbox"/>	3-SPDT	140 V AC / DC 1 A, 60 VA / W

#### Must specify with your orders


Check List:

- Overall stem length: L0= \_\_\_\_\_ (in/mm) (Upto 3000mm std.)
- Add dimensional position of float
- Pick wiring code:


#### Group 1



#### Group 2



#### Group 3



#### Group 4

