



**Technical features**

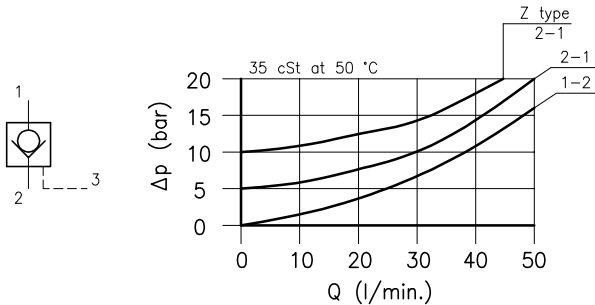

|   |                                       |           |
|---|---------------------------------------|-----------|
| Cavity  | (For dimensions see catalogue 17.000) | S 30/3    |
| Nominal flow  | (l/min.)                              | 40        |
| Max. pressure   | (bar)                                 | 350       |
| Pilot ratio   |                                       | 2.5:1     |
| Pilot volume  | (cm <sup>3</sup> )                    | 0.10      |
| Fluid viscosity range                                   | (cSt)                                 | 2.8 - 380 |
| Fluid temperature range                                 | (°C)                                  | -20 +80   |
| Mass  | (kg)                                  | 0.120     |
| Hydraulic fluid; mineral oil HM and HV                  |                                       | ISO 6074  |
| Recommended filtration; 19/15 ISO 4466 (25 μ absolutes) |                                       |           |
| Standard seals in Polyurethane and Buna N               |                                       |           |


**Dimensions**

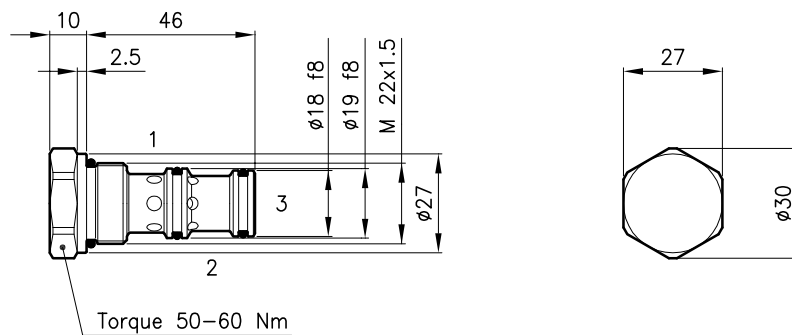

**Ordering informations**

**CAP 30/M-S**

**CAP 30** = Valve type



Standard spring

**M** = 5 bar

**Z** = 10 bar

**S** = Without O-Ring on the pilot piston  
(Omit in Standard version)

Codes:

CAP 30/M 32 011 104

CAP 30/M-S 32 011 105

CAP 30/Z 32 011 146

CAP 30/Z-S 32 011 155

External seals kit 90 620 104

CAP 30 valves can be assembled on standard bodies 30-C3 series; for dimensions see catalogue 16.010