



Schema



Valve	ETD 30/3214 (See catalogue 09.001)	
Cavity	(For dimensions see catalogue 17.000)	S 30/3
Max. flow	(l/min.)	25
Max. pressure	(bar)	210
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass (aluminium body only)	(kg)	0.410
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		
Standard body in aluminium		

Dimensions

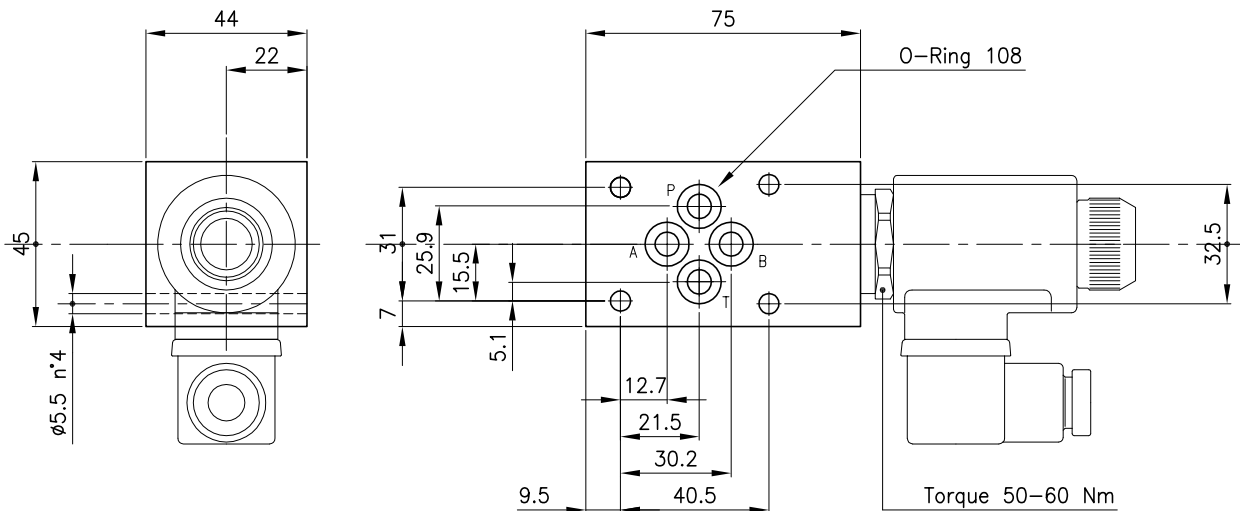

Versions

30-CFT 65

Size

Version

Body:

30-CFT 65

38 147 267